


PHYSICAL SPECIFICATION



Nominal Voltage		12V
Nominal Capacity (10HR)		100Ah
Dimension	Length	331±2mm (13.03 inches)
	Width	172±2mm (6.77 inches)
	Container Height	216±2mm (8.50 inches)
	Total Height	222±2mm (8.74 inches)
Weight		Approx. 28.5 Kg ±3% (62.83lbs)
Standard Terminal		B3(Bolt-and-nut terminal) Bolt Type: M6

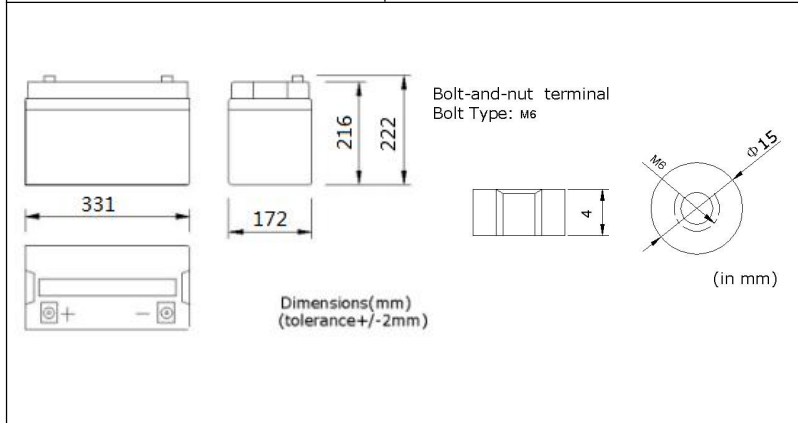

Shimastu Gel series Gel Batteries are manufactured with special separators and silica gel immobilizing the electrolyte inside the battery, it is perfect for frequent cyclic deep discharge or standby applications under harsh environments, and has a long service life.

Features:


- 1.Special polar plate design, which ensures a designed floating charge life of 15 years at 25°C (77 °F)
- 2.Equalized current distribution, the active material is not easy to fall off
- 3.High gas recombination efficiency
- 4.Good deep discharge resilience performance
- 5.No delamination phenomena in the electrolyte
- 6.Manufactured with high-porosity

ELECTRICAL SPECIFICATION

Characteristics

Capacity	10 hour rate (10A)	100Ah
	5 hour rate (17A)	85Ah
	3 hour rate (25A)	75Ah
	1 hour rate (55A)	55Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Max Discharge Current	1000A(5 Sec)	
Short Circuit Current	2150A	
Internal Resistance	Full charged battery (25°C, 77 °F) 6.8mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 25A Voltage 14.1~14.4V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 °F)

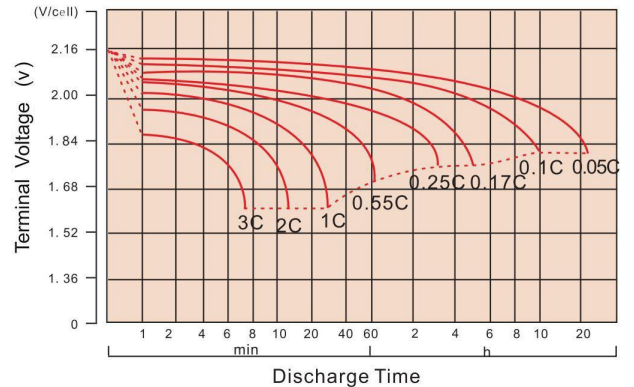


CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	10MIN	15MIN	30MIN	1HR	3HR	5HR	8HR	10HR	20HR
1.60V	240.4	181.0	108.1	62.0	28.3	18.9	12.7	10.6	5.51
1.65V	218.9	173.0	103.9	59.7	27.4	18.4	12.5	10.4	5.44
1.70V	198.9	162.1	99.5	57.4	26.7	17.9	12.4	10.3	5.36
1.75V	181.7	150.8	94.7	55.0	25.8	17.5	12.2	10.1	5.30
1.80V	165.0	139.2	90.6	53.0	25.0	17.0	12.0	10.0	5.25


CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	10MIN	15MIN	30MIN	1HR	3HR	5HR	8HR	10HR	20HR
1.60V	397.7	316.5	196.4	116.6	54.0	36.6	25.0	20.9	10.8
1.65V	379.4	307.0	190.8	112.8	52.6	35.6	24.6	20.6	10.7
1.70V	351.0	291.8	184.4	109.1	51.3	34.8	24.2	20.3	10.6
1.75V	326.3	275.5	177.3	105.2	50.1	34.0	23.9	20.0	10.5
1.80V	301.5	258.0	171.4	102.0	48.5	33.2	23.7	19.7	10.4

Cycle service life

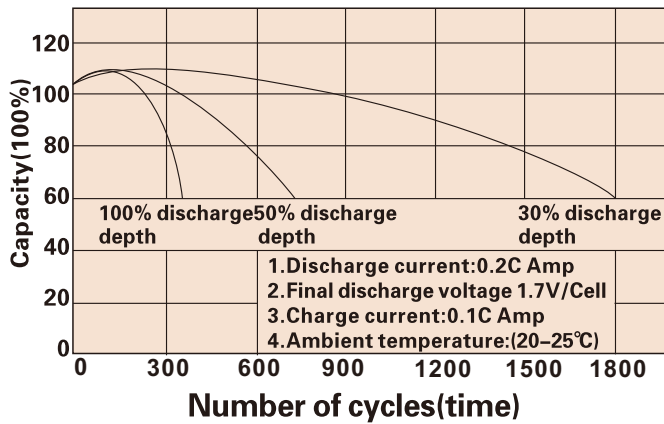


Trickle(or float) service life

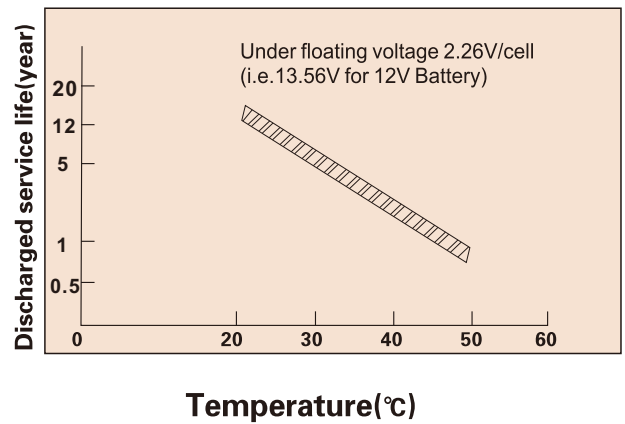


Storage time(months)



Temperature and discharge capacity

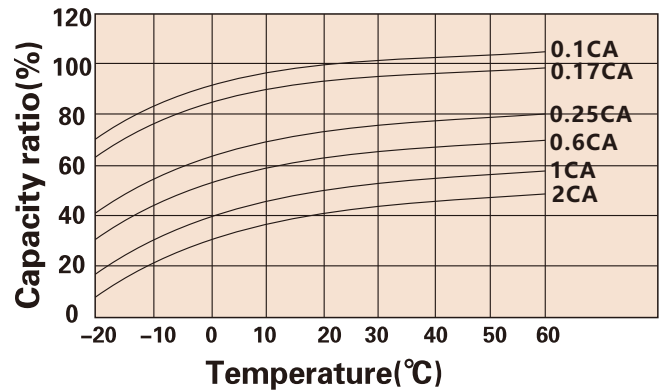

Charging characteristic

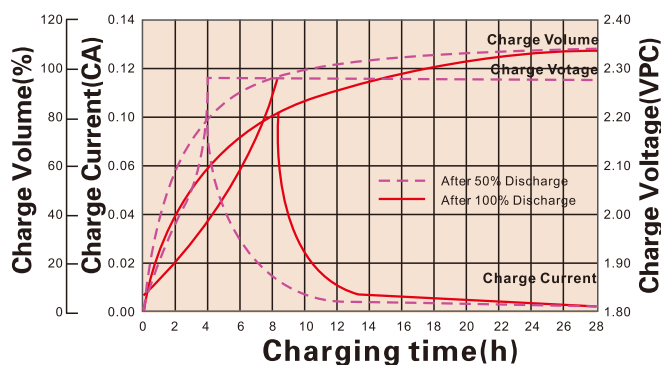

Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.